

Actuator for smoke control dampers  
90°

- Nominal torque 25 Nm
- Nominal voltage AC/DC 24 V
- Control Open-close
- Spindle driver Form fit 12x12 mm, Continuous hollow shaft


**Technical data**

<b>Electrical data</b>	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...28.8 V / DC 21.6...28.8 V
	Switching thresholds min. ON voltage	AC 19.2 V / DC 21.6 V
	Switching thresholds max. OFF voltage	AC 5 V / DC 7 V
	Power consumption in operation	2.5 W
	Power consumption in rest position	0.1 W
	Power consumption for wire sizing	5 VA
	Power consumption for wire sizing note	I <sub>max</sub> 8.2 A @ 5 ms
	Auxiliary switch	2 x SPDT
	Switching capacity auxiliary switch	1 mA...3 (0.5 inductive) A, AC 250 V
	Switching points auxiliary switch	5° / 80°
	Tolerance	±3°
	Connection supply / control	Cable 1 m, 3 x 0.75 mm <sup>2</sup> , halogen-free
Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm <sup>2</sup> , halogen-free	
<b>Functional data</b>	Nominal torque	25 Nm
	Direction of rotation motor	can be selected by mounting
	Manual override	with hand crank
	Angle of rotation	Max. 95°
	Running time motor	<60 s / 90°
	Sound power level, motor	58 dB(A)
	Spindle driver	Form fit 12x12 mm, Continuous hollow shaft
	Position indication	Mechanically, with pointer
	Service life	Min. 10,000 cycles
	<b>Safety</b>	Protection class IEC/EN
Protection class auxiliary switch IEC/EN		II reinforced insulation
Degree of protection IEC/EN		IP54
EMC		CE according to 2014/30/EU
Low voltage directive		CE according to 2014/35/EU
Certification IEC/EN		IEC/EN 60730-1 and IEC/EN 60730-2-14
Mode of operation		Type 1.B
Rated impulse voltage supply / control		0.8 kV
Rated impulse voltage auxiliary switch		4 kV
Control pollution degree		3
Ambient temperature		-30...55 °C
Non-operating temperature		-40...80 °C
Ambient humidity		Max. 95% r.h., non-condensing
Maintenance		Maintenance-free
<b>Weight</b>	Weight	1.1 kg

**Safety notes**


- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- The actuator is adapted to and installed on the smoke control damper by the damper manufacturer. For this reason, the actuator is only supplied direct to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.

## Safety notes

- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/ safety extra-low voltage is not permitted.
- Cables must not be removed from the device.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

## Product features

<b>Mode of operation</b>	2-wire open-close control. The actuator is overload-proof and can thus remain energised even at the end stops.
<b>Safety Position Lock</b>	The Safety Position Lock™ reliably holds the smoke control damper in the defined safety position in case of fire, thus ensuring maximum safety.
<b>Signalling</b>	Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. It should be noted with this application however that the contacts can no longer be used in the milliamperere range after larger currents have been applied to them, even if this has taken place only once. The position of the damper blade can be read off on a mechanical position indication.
<b>Manual operation</b>	The hand crank included in the shipment can be used for manual operation of the actuator.
<b>Standards / regulations</b>	The design of the actuator is based on the specific requirements from the European standards: <ul style="list-style-type: none"> <li>• EN 12101-8: Smoke and heat control systems - Part 8: Smoke control dampers</li> <li>• EN 1366-10: Fire resistance tests for service installations - Part 10: Smoke control dampers</li> <li>• EN 13501-4: Fire classification of construction products and building elements - Part 4: Classification using data from fire resistance tests on components of smoke control systems</li> </ul>
<b>Delivery notes</b>	Incl. Hand crank, Pointer, Protective bag

## Electrical installation




### Notes

- Connection via safety isolating transformer.
- Parallel connection of other actuators possible. Observe the performance data and the switching thresholds.
- Combination of power supply voltage and safety extra-low voltage not permitted at the both auxiliary switches.

## Wiring diagrams

AC/DC 24 V, open-close

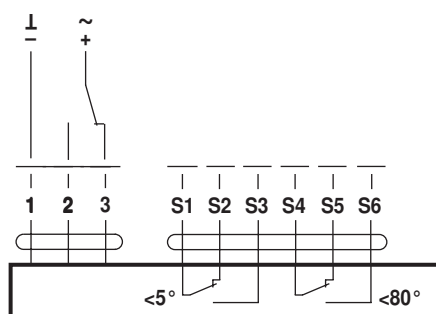

### Cable colours:

- 1 = black
- 2 = red
- 3 = white
- S1 = violet
- S2 = red
- S3 = white
- S4 = orange
- S5 = pink
- S6 = grey

## Dimensions [mm]

## Dimensional drawings

